

泰隆源便携式太阳能板

Tailongyuan portable solar panel

SFZD-150B SFZD-160B SFZD-200B SFZD-250B SFZD-300B



工作电压:18V

Working Voltage (V_{mp}) : 18V

开路电压:21V

Open Circuit Voltage(V_{oc}): 21V



DC 输出/DC Output



USB 输出/USB Output

- DC5521: 18V
- USB (QC3.0): 5V/3.4A、9V/2A、12V/1.5A, USB: 5V/2.4A

定制出线/Customized outgoing line



DC 输出/DC Output



USB 输出/USB Output



安德森 输出/Anderson output



鳄鱼夹输出/Crocodile clip output



可折叠面板/Foldable solar panel

折叠后的太阳能板，重量仅有3.45kg,单手可提动，携带更方便。

The folded solar panel weighs only 3.45kgs, can be lifted with one hand, making it more convenient to carry.



安全可靠/Safety Technology



过压保护

Over-Voltage protection



过流保护

Over-current protection



过载保护


Over-load Protection



细节展示/The details show



定制出线
Customized outgoing line

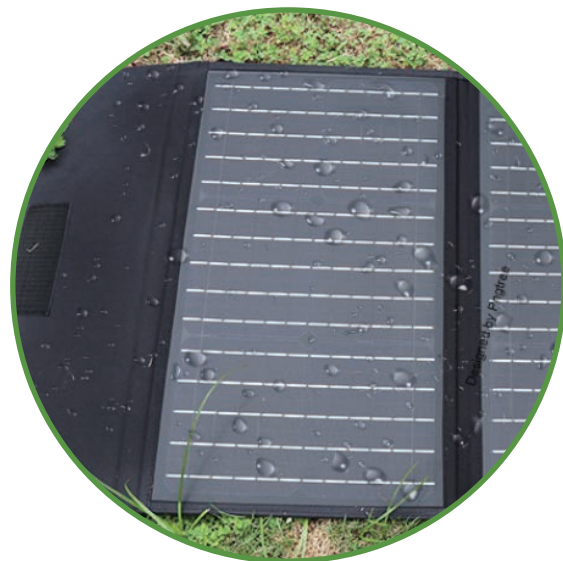

PTE 面板
PTE panel




PVC 面料+提手
PVC fabric+handle



内箱包装
Inner box packaging


稳定支架 | 随时调节角度

Stabilizing stand | Adjust the angle at any time

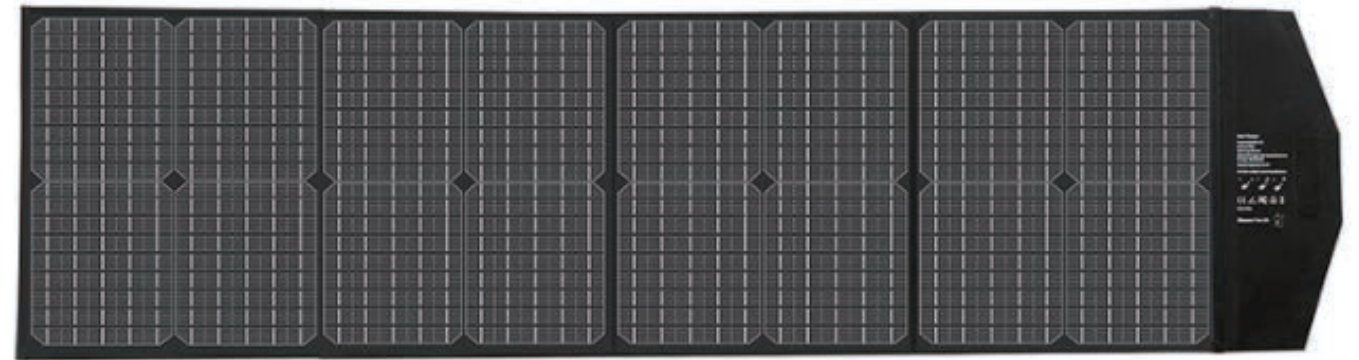

产品参数/Product parameters

型号 Model:	SFZD-150B	SFZD-160B	SFZD-200B	SFZD-250B	SFZD-300B
峰值功率 Peak Power (Pmax):	150Wp	160Wp	200Wp	250Wp	300Wp
工作电压 Working Voltage (Vmp):	18V	18V	18V	18V	18V
工作电流 Working Current (Imp):	8.33A	8.89A	11.11A	13.89	16.67A
开路电压 Open Circuit Voltage(Voc):	21.6V	21.6V	21.6V	21V	21V
短路电流 Short Circuit Current(Isc):	9.17A	9.78A	12.22A	15.28A	18.33A
电池片 Battery Plate:	单晶156 (Mon 156)	单晶156 (Mon 156)	单晶156 (Mon 156)	单晶156 (Mon 156)	单晶156 (Mon 156)
温度范围 Temperature Range:	-40°C~+70°C	-40°C~+70°C	-40°C~+70°C	-40°C~+70°C	-40°C~+70°C
接线盒输出 Output Connector:	输出接头: PV1-F1*4mm2电缆或MC4 (Output connector: PV1-F1*4mm2 cable or MC4)				
折叠尺寸 Dimension folded:	674*403*40mm	635*350*45mm	674*403*45mm	674*403*50mm	674*403*55mm
展开尺寸 Power Indicator:	1460*674*5mm	1650*635*5mm	1884*674*5mm	2315*674*5mm	2750*674*5mm
独立包装尺寸 Dimension:	705*445*55mm	660*390*55mm	700*445*55mm	700*445*60mm	700*445*65mm
净重 Net weight:	5.1Kg	5.4Kg	6.2Kg	7.3Kg	8.4Kg
毛重 Gross weight:	5.4Kg	5.7Kg	6.5Kg	7.6Kg	8.7Kg
外包装尺寸 Outer box size(L*W*H):	440*300*410mm	675*185*410mm	715*185*465mm	715*200*465mm	715*215*465mm
装箱数量 Packing quantity:	3个	3个	3个	3个	3个
整箱重量 Weight:	17.5Kg	18.3Kg	21Kg	24.3Kg	27.6Kg
配件 Package include:	定制出线安德森接口 说明书 (Customized outgoing line, User manual)				

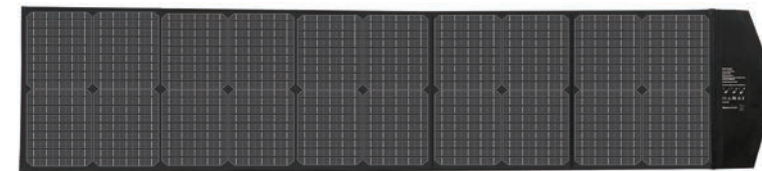

便携式太阳能/Solar Panel



说明书/European



定制出线
Customized outgoing line

*技术参数参考，实际数据以出货产品为准。*The technical parameters may vary slightly. Please refer to the physical object.

搭配户外电源 | 永不断电

太阳能板可与储能电源搭配使用，白天用太阳能板给电源储充电夜晚可给设备供电。储能电源配有AC、DC、USB、车充输出，满足户外用需求。

With outdoor power station | Never power off

Solar panels can be used in conjunction with Power stations, and solar panels are used to provide energy during the daytime. The devices can be charged at night. The power station is equipped with AC, DC, USB, car charger output, to meet the needs of outdoor use.





深圳市泰隆源科技有限公司/SHEN ZHEN TAI LONG YUAN TECHNOLOGY CO., LTD

地址：广东省深圳市宝安区新和大道丽城科技工业园Y栋4楼

Add: 4th Floor, Building Y, Licheng Technology Industrial Park, Xinhe Avenue, Shajing Street, Baoan District, Shenzhen, China

邮箱(E-mail): roger@tlytech.com

线下渠道合作(Offline channel cooperation): 13924860526

官网: <http://www.tlytech.com>